

WASHTECH®

PROFESSIONAL WASH SYSTEMS

CD100

2 Stage Conveyor Dishwasher

W 1500mm x D 765mm x H 1450mm

The CD 100 is a fully automatic rack conveyor dishwasher with a powerful wash zone, followed by a final rinse zone which is controlled to ensure that water is consumed only when racks are in the rinse zone.

Standard Features

- 2 stage rack conveyor dishwasher with powerful wash and sanitising final rinse
- Low water consumption - 300 litres per hour maximum
- 100 racks per hour standard setting - higher throughput on request to 200 racks per hour
- Powerful wash via removable upper and lower stainless steel wash arms
- Rinse economiser - machine uses water only when rack is in rinse zone
- Automatic tank fill and run-dry protection for incalloy heating elements
- Interlocked wash and rinse heating

- Low temperature deactivation to ensure hygiene and regulatory compliance
- Powerful drive with safety clutch and optional bench stop switch
- Safety stop switches to all doors
- 1.5kW wash pump
- Vent hoods fitted standard with duct connections, baffles and easy bench connection
- Full width, easily removable wash filter trays
- All stainless steel construction
- Simple electromechanical controls for ease of service
- Adjustable 200mm stainless legs
- Modular range includes options to allow installation in minimal area
- CAD design service for layout options
- Nationwide installation and after sales support

The unit shall be a Watermark certified Washtech rack conveyor dishwasher with a standard setting of 100 dishracks per hour, with optional higher speed settings, and maximum water consumption of 300 litres per hour. The unit shall be supplied with 500mm cup and dishracks and have a vertical wash chamber clearance of 400mm. The unit shall be fitted with a 1.5kW wash pump and removable all stainless rinse arms and wash arms in cassettes all with removable end plugs for easy cleaning. Access to the wash chamber shall be via a full width countersprung front door. The unit shall be fitted with dual drive bars, automatic fill and low level water protection and a rinse economizer to ensure that water is consumed only while racks are in the rinse zone. The unit shall be shipped in 100% recyclable packaging. Height of machine shown includes height with maximum 50mm adjustable leg option in use.




WASHTECH®

PROFESSIONAL WASH SYSTEMS

CD100

2 Stage Conveyor Dishwasher

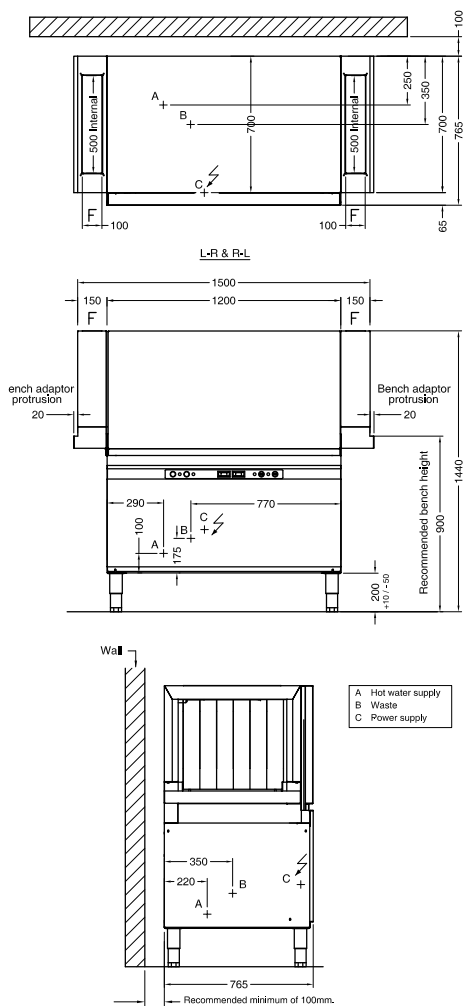

A Hot Water			Dimensions	
temperature	65°C		Width	1500mm
connection	3/4"		Depth	765mm
pressure	200-350kPa		Height	1450mm
flow	20 litres per min		Weight	184kg
quality	potable & soft			
B Waste			Packed Dimensions	
connection	1.5 BSP		Width	1700mm
line	2" BSP		Depth	875mm
			Height	1510mm
			Weight	262kg
C Electrical			Cubicmetres	2.25m ³
3 phase N+E 415V 50Hz	15 amp			

Refer operator manual for complete installation instructions



Australia
www.moffat.com.au

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au