

# WASHTECH®

PROFESSIONAL WASH SYSTEMS

## CD150

### 3 Stage Conveyor Dishwasher

**W 2100mm x D 765mm x H 1450mm**

The CD 150 is a fully automatic rack conveyor dishwasher with prewash, powerful wash, and final rinse. The rinse economiser ensures that water is consumed only when racks are in the rinse zone.

#### Standard Features

- 3 stage rack conveyor dishwasher with prewash, powerful wash and sanitising final rinse
- Low water consumption - 300 litres per hour maximum
- 150 racks per hour standard setting - higher throughput on request to 200 racks per hour
- Powerful wash via removable upper and lower stainless steel wash arms
- Rinse economiser - machine uses water only when rack is in rinse zone
- Automatic tank fill and run-dry protection for incalloy heating elements
- Interlocked wash and rinse heating
- Low temperature deactivation to ensure hygiene and regulatory compliance
- Powerful drive with safety clutch and optional bench stop switch
- Safety stop switches to all doors
- 1.5kW wash pump
- Vent hoods fitted standard with duct connections, baffles and easy bench connection
- Full width, easily removable wash filter trays
- All stainless steel construction
- Simple electromechanical controls for ease of service
- Adjustable 200mm stainless legs
- Modular range includes options to allow installation in minimal area
- CAD design service for layout options
- Nationwide installation and after sales support

The unit shall be a Watermark certified Washtech rack conveyor dishwasher with a standard setting of 150 dishracks per hour, with optional higher speed settings and maximum water consumption of 300 litres per hour. The unit shall be supplied with 500mm cup and dishracks and have a vertical wash chamber clearance of 400mm. The unit shall be fitted with a 0.75kW prewash pump, a 1.5kW wash pump and removable all stainless rinse arms and wash arms in cassettes all with removable end plugs for easy cleaning. Access to the wash chamber shall be via a full width countersprung front door. The unit shall be fitted with dual drive bars, automatic fill and low level water protection and a rinse economizer to ensure that water is consumed only while racks are in the rinse zone. The unit shall be shipped in 100% recyclable packaging. Height of machine shown includes height with maximum 50mm adjustable leg option in use.




# WASHTECH®

PROFESSIONAL WASH SYSTEMS

## CD150

### 3 Stage Conveyor Dishwasher

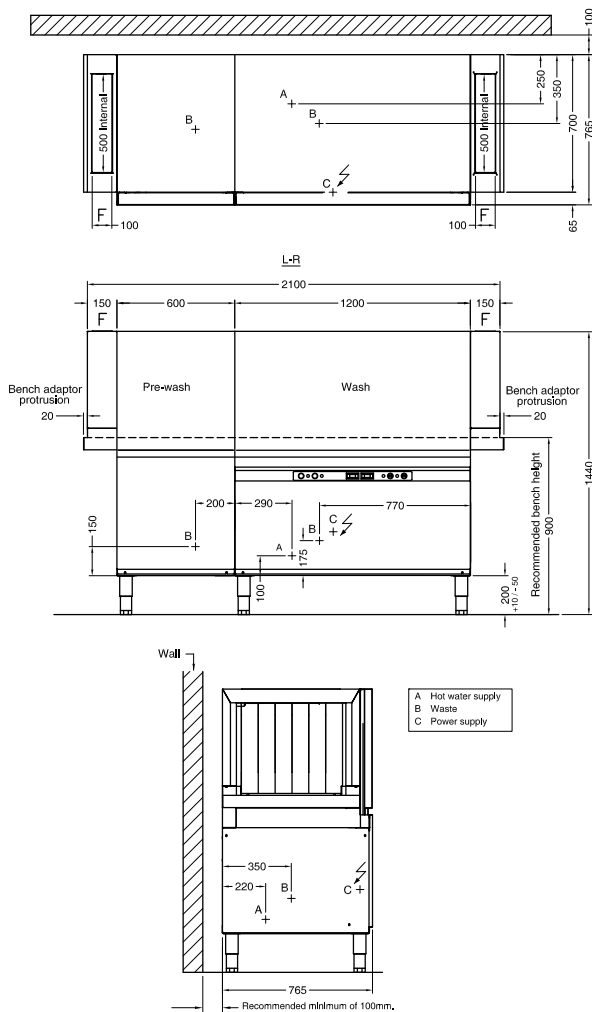

<b>A Hot Water</b>		temperature	65°C	<b>Dimensions</b>	
		connection	3/4"	Width	2100mm
		pressure	200-350kPa	Depth	765mm
		flow	20 litres per min	Height	1450mm
		quality	potable & soft	Weight	265kg
<b>B Waste</b>				<b>Packed Dimensions</b>	
		connection	1.5 BSP	Width	2300mm
		line	2" BSP	Depth	875mm
<b>C Electrical</b>				Height	1510mm
		3 phase N+E 415V 50Hz	30 amp	Weight	350kg
				Cubicmetres	3.04m <sup>3</sup>

Refer operator manual for complete installation instructions



Australia  
www.moffat.com.au

Australia  
Moffat Pty Limited

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au  
www.moffat.com.au

New South Wales  
Telephone 02-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone 03-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone 07-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone 08-9202 6820  
bgarcia@moffat.com.au

