

# WASHTECH®

PROFESSIONAL WASH SYSTEMS

## CD200

### 4 Stage Conveyor Dishwasher

W 2700mm x D 765mm x H 1450mm

The CD 200 is a fully automatic rack conveyor dishwasher with powerful prewash and wash zones plus ecorinse - now a triple final rinse system. The rinse economiser switch ensures that water is consumed only when racks are in the final rinse zone.

#### Standard Features

- 4 stage rack conveyor dishwasher with powerful prewash and wash zones and a triple final rinse system
- Low water consumption - 300 litres per hour maximum
- 200 racks per hour standard setting - higher throughput on request to 240 racks per hour
- Powerful wash via removable upper and lower stainless steel wash arms
- Rinse economiser - machine uses water only when rack is in rinse zone
- Triple final rinse
- Automatic tank fill and run-dry protection for incolloy heating elements
- Interlocked wash and rinse heating
- Low temperature deactivation to ensure hygiene and regulatory compliance
- Powerful drive with safety clutch and optional bench stop switch
- Safety stop switches to all doors
- 1.5kW wash pump
- 0.8kW prewash pump
- Vent hoods fitted standard with duct connections, baffles and easy bench connection
- Full width, easily removable wash filter trays
- All stainless steel construction
- Simple electromechanical controls for ease of service
- Adjustable 200mm stainless legs
- Modular range includes options to allow installation in minimal area
- CAD design service for layout options
- Nationwide installation and after sales support

The unit shall be a Watermark certified Washtech rack conveyor dishwasher capable of washing 200 racks per hour, with maximum water consumption of 300 litres per hour. The unit shall be supplied with 500mm cup and dishracks and have a vertical wash chamber clearance of 400mm. The unit shall be fitted with a 0.8kW prewash pump, a 1.5kW wash pump and a separate dedicated double final rinse module, plus removable all stainless rinse arms and wash arms in cassettes all with removable end plugs for easy cleaning. Access to the wash chamber shall be via a full width countersprung front door. The unit shall be fitted with dual drive bars, automatic fill and low level water protection and a rinse economizer to ensure that water is consumed only while racks are in the rinse zone. The unit shall be shipped in 100% recyclable packaging. Height of machine shown includes height with maximum 50mm adjustable leg option in use.




# WASHTECH®

PROFESSIONAL WASH SYSTEMS

## CD200

### 4 Stage Conveyor Dishwasher

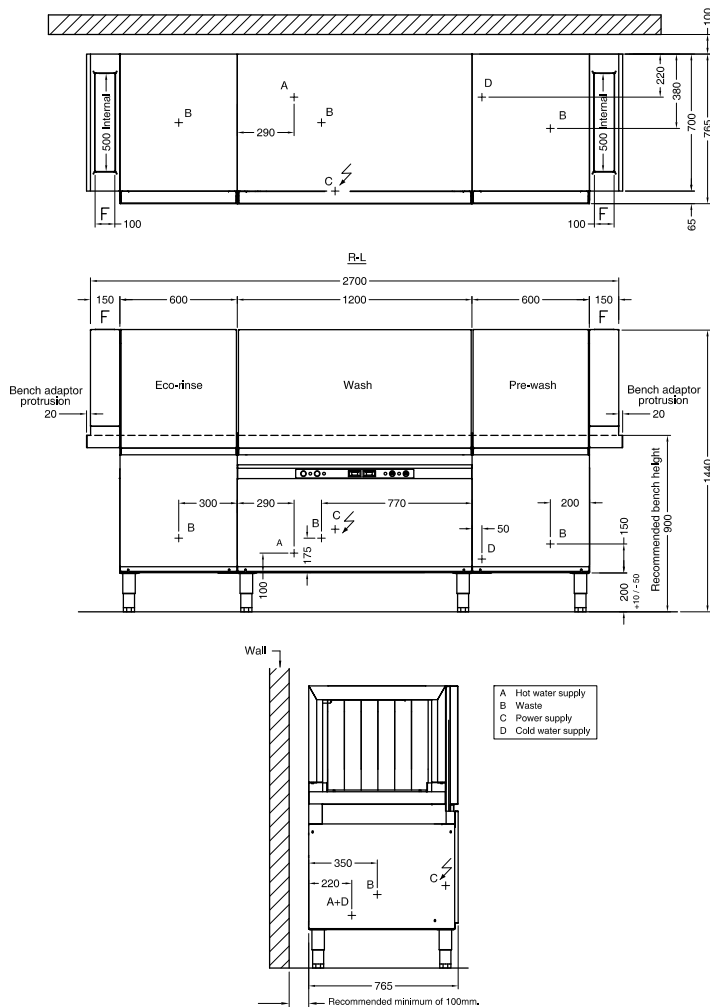

- A Hot Water**  
 temperature 65°C  
 connection 3/4"  
 pressure 200-350kPa  
 flow 20 litres per min  
 quality potable & soft
- B Waste**  
 connection 1.5 BSP  
 line 2" BSP
- C Electrical**  
 3 phase N+E 415V 50Hz 40 amp
- C Cold Water**  
 Details as per (A)

Refer operator manual for complete installation instructions

- Dimensions**  
 Width 2700mm  
 Depth 765mm  
 Height 1450mm  
 Weight 340kg

- Packed Dimensions**  
 Width 2905mm  
 Depth 875mm  
 Height 1510mm  
 Weight 440kg  
 Cubicmetres 3.84m<sup>3</sup>



Australia  
[www.moffat.com.au](http://www.moffat.com.au)

Australia  
 Moffat Pty Limited

Victoria/Tasmania  
 740 Springvale Road  
 Mulgrave, Victoria 3170  
 Telephone 03-9518 3888  
 Facsimile 03-9518 3833  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)  
[www.moffat.com.au](http://www.moffat.com.au)

New South Wales  
 Telephone 02-8833 4111  
[nswsales@moffat.com.au](mailto:nswsales@moffat.com.au)

South Australia  
 Telephone 03-9518 3888  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

Queensland  
 Telephone 07-3630 8600  
[qldsales@moffat.com.au](mailto:qldsales@moffat.com.au)

Western Australia  
 Telephone 08-9202 6820  
[bgarcia@moffat.com.au](mailto:bgarcia@moffat.com.au)

